

US1400LPTD

LOW PROFILE FLUORESCENT EMERGENCY BALLAST
 1400 LUMENS

STANDARD



ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting
- Operates one lamp in the emergency mode for a minimum of 90-minutes
- Provides a maximum initial lumen output of 1400 lumens

ELECTRICAL

- Dual 120-277V
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 12V long life, maintenance-free, rechargeable sealed NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Time delay enhancement to overcome end-of-life circuit protection

MOUNTING

- Suitable for installation inside, on top or in remote* of the fixture
- Can be used in both switched and unswitched fixtures
- UL Listed for factory or field installation

HOUSING

- Low profile galvanized steel construction
- Compact design fits most fluorescent fixtures


LISTINGS AND WARRANTIES

- Five year warranty against defects in material and workmanship (lamps excluded)
- Meets UL924, NF PA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations (0°C – 50°C)



LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic, standard and dimming AC ballasts
- Operates one T5, T5HO, T8, T12, Circular T5/T9, U-bend T8/T12 and 4-Pin long CFL lamp in emergency mode. Refer to the chart on the next page for a complete list of compatible lamps

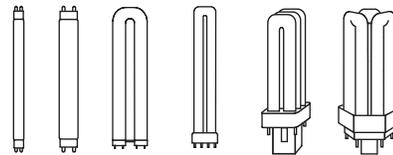

LAMP COMPATIBILITY CHART

WATTS	LAMP TYPE	INITIAL LUMENS		WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP			1-LAMP	2-LAMP
14	T5	800	850	34	T12	950	1025
21	T5	900	1025	40	T12	1050	1100
28	T5	1250	-	75	T12	1300	-
39	T5HO	1300	-	85	T12	1400	-
54	T5HO	1350	-	95	T12HO	1400	-
17	T8	1050	1100	110	T12HO	1400	-
25	T8	1250	1300	160	T12HO	1400	-
32	T8	1300	1350	215	T12HO	1400	-
40	T8	1350	1400				
59	T8	1400	-				
86	T8HO	1400	-				
20	T12	700	800				
25	T12	800	850				
30	T12	900	975				

*When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

NOTE: In 2-lamp operation, lumens are equally split between the two lamps

ELECTRICAL INFORMATION

WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP
14	T5	800	850
21	T5	900	1025
28	T5	1250	-
39	T5HO	1300	-
54	T5HO	1350	-
17	T8	1050	1100
25	T8	1250	1300
32	T8	1300	1350
40	T8	1350	1400
59	T8	1400	-
86	T8HO	1400	-
20	T12	700	800
25	T12	800	850
30	T12	900	975

WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP
34	T12	950	1025
40	T12	1050	1100
75	T12	1300	-
85	T12	1400	-
95	T12HO	1400	-
110	T12HO	1400	-
160	T12HO	1400	-
215	T12HO	1400	-
13	CFL G24q1	750	800
18	CFL G24q2	900	1000
26	CFL G24q3	1025	1100
32	CFL G24q3	1200	1250
42	CFL G24q4	1300	-
57	CFL G24q5	1350	-

WATTS	LAMP TYPE	INITIAL LUMENS	
		1-LAMP	2-LAMP
18	CFL 2G11	900	1050
24	CFL 2G11	1100	1150
36	CFL 2G11	1200	1275
40	CFL 2G11	1250	-
50	CFL 2G11	1325	-
55	CFL 2G11	1350	-
32	Circular T9	750	800
40	Circular T9	900	1050
22	Circular T5	850	950
40	Circular T5	1100	1200
50	Circular T5	1300	1350
32	U-bend T8	825	900
34	U-bend T12	875	950
40	U-bend T12	800	925

NOTE: In 2-lamp operation, lumens are equally split between the two lamps.