

US3000TD-SDT

FLUORESCENT EMERGENCY BALLAST 3000 LUMENS WITH SELF-DIAGNOSTICS

STANDARD



ILLUMINATION

- Works with or without an AC ballast to convert new or existing fluorescent fixtures in to unobtrusive emergency lighting
- Operates one lamp in the emergency mode for a minimum of 90-minutes
- Provides a maximum initial lumen output of 3000 lumens

ELECTRICAL

- Universal 120-277V
- Charge/Power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- 14.4V long life, maintenance-free, rechargeable sealed NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to fluorescent lamp for minimum 90-minute emergency illumination
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Time delay enhancement to overcome end-of-life circuit protection
- Self-diagnostics feature performs monthly biannual and annual tests to ensure reliable operation and meet electrical and life safety codes

MOUNTING


- Suitable for installation inside, on top or in remote* of the fixture
- Can be used in both switched and unswitched fixtures
- UL Listed for factory or field installation

HOUSING

- Durable painted steel construction in red finish
- Provided with 2' flex conduit


LISTINGS AND WARRANTIES

- Five year warranty against defects in material and workmanship (lamps excluded)
- Meets UL924, NF PA 101 Life Safety Code, NEC, OSHA, Local and State Codes
- UL Listed for damp locations
- Suitable for use in sealed and gasketed fixtures

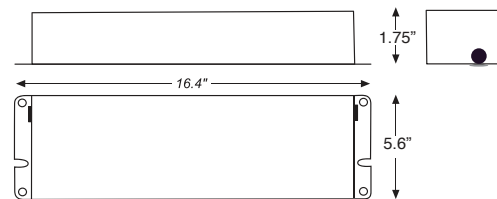

LAMP COMPATIBILITY

- Compatible with most one-, two-, three-, and four-lamp electronic, standard and dimming AC ballasts
- Operates one T5, T5HO, T8, T12, Circular T5/T9, U-bend T8/T12 and 4-Pin long CFL lamp in emergency mode. Refer to the chart on the next page for a complete list of compatible lamps

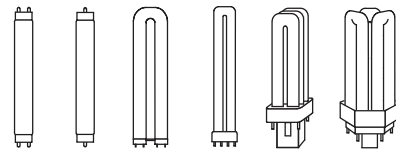

LAMP COMPATIBILITY CHART

LAMP TYPE	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
T5	14	1150	1200
T5	21	1650	1750
T5	28	2250	2400
T5	35	2700	2800
T5HO	24	1750	1850
T5HO	39	2650	2750
T5HO	54	2900	3000
T8	17	1150	1200
T8	25	1650	1800
T8	28	1700	1800
T8	32	2850	2900
T8	40	2900	2950
T8HO	44	2900	n/a
T8	51	3000	n/a

LAMP TYPE	WATTS	INITIAL LUMENS	
		1-Lamp	2-Lamp
T8	59	3000	n/a
T8HO	86	2950	n/a
T12	20	900	950
T12	25	1100	1200
T12	30	1550	1600
T12	34	1700	1800
T12	40	2250	2400
T12	75	2950	n/a
T12	85	3000	n/a
T12HO	95	3000	n/a
T12HO	110	3000	n/a
T12HO	160	3000	n/a
T12HO	215	3000	n/a

* When battery packs are remote mounted, the remote distance cannot exceed 1/2 of the distance from ballast to lamp specified by the A.C. ballast manufacturer. The maximum allowable remote mounting distance is 50 feet.

NOTE: In 2-lamp operation, lumens are equally split between the two lamps